
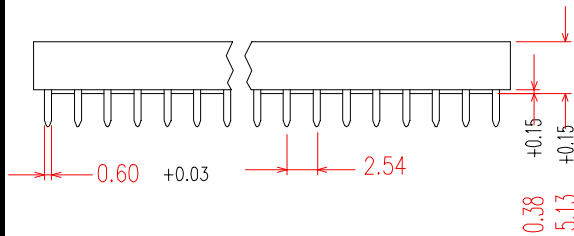



CUSTOMER DRAWING ONLY

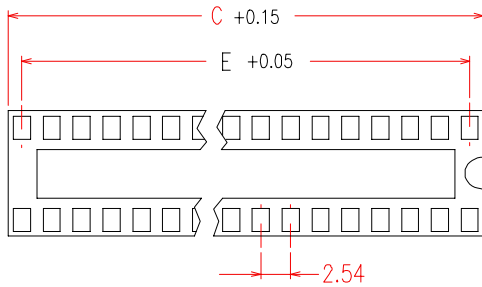

NOTES

- 1.MATERIAL :
INSULATOR – 30% G.F. POLYESTER UL 94V-0
CONTACT – PHOSPHOR BRONZE
- 2.PLATING-TIN
- SPECIFICATION
 - 1.INSERTION FORCE :340 gw MAX.
 - 2.EXTRACTION FORCE : 50 gw MIN.
 - 3.CURRENT RATING : 1 Amp
 - 4.CONTACT RESISTANCE : 20 mohm MAX.
 - 5.INSULATION RESISTANCE : 1000 Mohm MIN.
 - 6.WITHSTANDING VOLTAGE : 1000 V rms. MIN.
 - 7.OPERATION TEMP. : -55°C TO +105°C. OPERATION TEMP. : -55°C

AVAILABLE CKT	DIMENSION				
	mm (inch)				
	A	B	C	D	E
6	7.62(.300)	10.01(.394)	7.49(.295)	8.13(.320)	5.08(.200)
8	7.62(.300)	10.01(.394)	10.03(.395)	8.13(.320)	7.62(.300)
14	7.62(.300)	10.01(.394)	17.65(.695)	8.13(.320)	15.24(.600)
16	7.62(.300)	10.01(.394)	20.19(.795)	8.13(.320)	17.78(.700)
18	7.62(.300)	10.01(.394)	22.73(.895)	8.13(.320)	20.32(.800)
20	7.62(.300)	10.01(.394)	25.27(.995)	8.13(.320)	22.86(.900)
22	7.62(.300)	10.01(.394)	27.81(1.095)	8.13(.320)	25.40(1.000)
24	7.62(.300)	10.01(.394)	30.35(1.195)	8.13(.320)	27.94(1.100)
28	7.62(.300)	10.01(.394)	35.43(1.395)	8.13(.320)	33.02(1.300)
22	10.16(.400)	12.56(.494)	27.81(1.095)	10.67(.420)	25.40(1.000)
24	10.16(.400)	12.56(.494)	30.35(1.195)	10.67(.420)	27.94(1.100)
24	15.24(.600)	17.63(.694)	30.35(1.195)	15.75(.620)	27.94(1.100)
28	15.24(.600)	17.63(.694)	35.43(1.395)	15.75(.620)	33.02(1.300)
32	15.24(.600)	17.63(.694)	40.51(1.595)	15.75(.620)	38.10(1.500)
40	15.24(.600)	17.63(.694)	50.67(1.995)	15.75(.620)	48.26(1.900)
42	15.24(.600)	17.63(.694)	53.21(2.095)	15.75(.620)	50.80(2.000)

Drawn By: LJ, H	Checked By: PFR	Material: INSULATOR: PBT (UL94V-0) CONTACT: PHOSPHOR BRONZE	Chupond America, Inc. 6168 Greenhill Rd. New Hope, PA 18938-9630 USA	
Drawn: 2/26/94	Scale: None	Plating: 150u" Sn/Pb over Ni		TITLE: LOW COST STAMPED DIP SOCKETS
Released: 2/28/94	Sheet 1 of 1	Tolerances: ± 0.125mm; ± 0.25mm; and ±2°		ENG. #: 0100-XXX Rev.

This drawing contains information proprietary to Chupond America, Inc. and cannot be used without permission