


CUSTOMER DRAWING ONLY

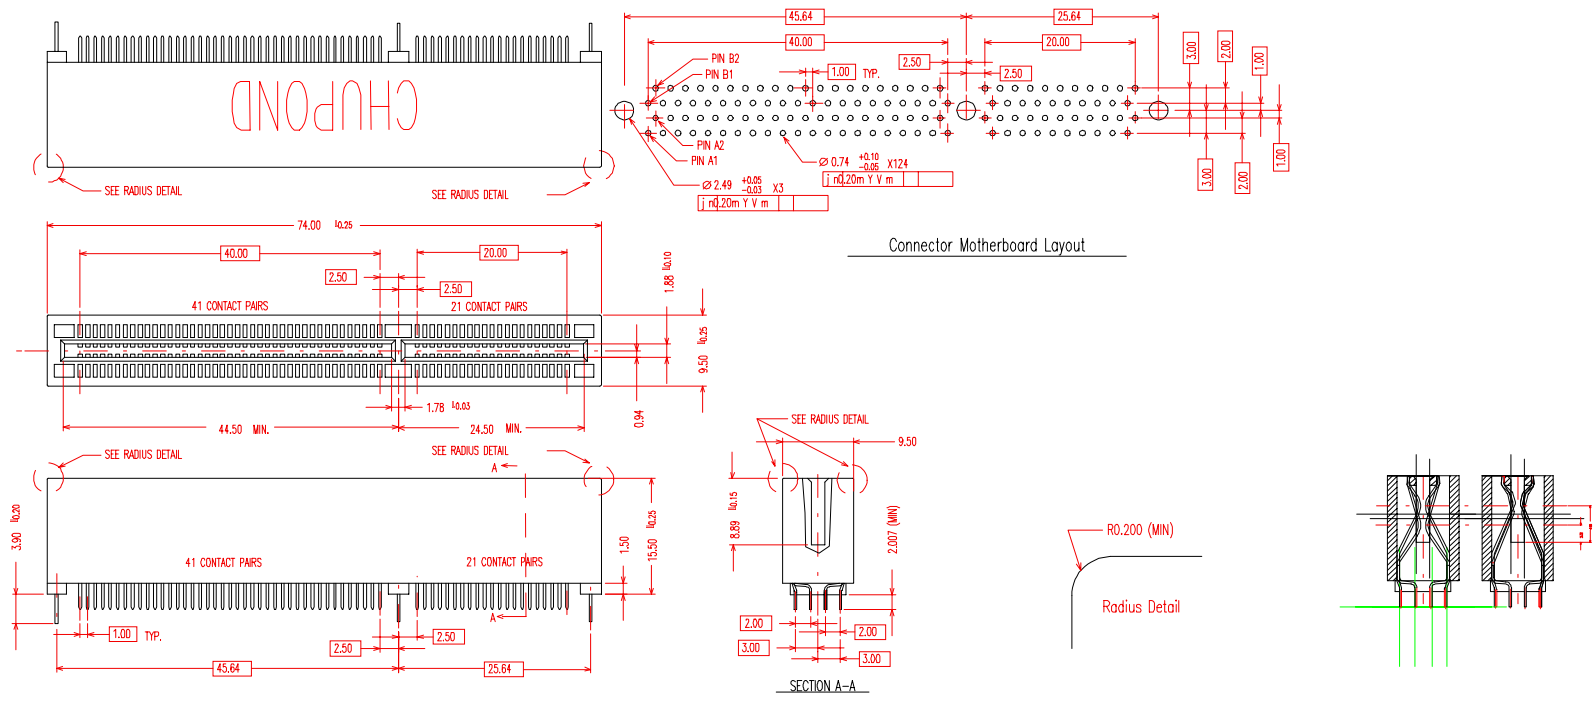

Drawn by: LJH	Checked by: PFR	Contact: Phosphor Bronze, plated 2μ" Au over 15μ" PdNi, over 50μ" Ni Soldertail: Plated 100μ" SnPb over 50μ" Ni Housing: Glass-filled PCT, color brown, UL94V-0	Chupond America, Inc. 6168 Greenhill Rd. New Hope, PA 18938-9630, USA
Date: 12/17/97	Scale: NONE	Contact Resistance: 30 milliohms max, Current Rating: 0.5A per contact Dielectric Withstanding Voltage: 500VAC Min Insulation Resistance: 100 Megohms min., Operating Temp: -55°C to +125°C Insertion per Contact/pair: 94g max, Withdrawal per Contact/pair: 56g max	TITLE: AGP Connector
Release Date: 12/17/97	Sheet 1 of 1	TOLERANCES: +/- 0.25mm; +/- 3°	ENG. NO.: 02-XX-3-X-1124
			Rev. C

This drawing contains information proprietary to Chupond America and cannot be used without permission