



CUSTOMER DRAWING ONLY

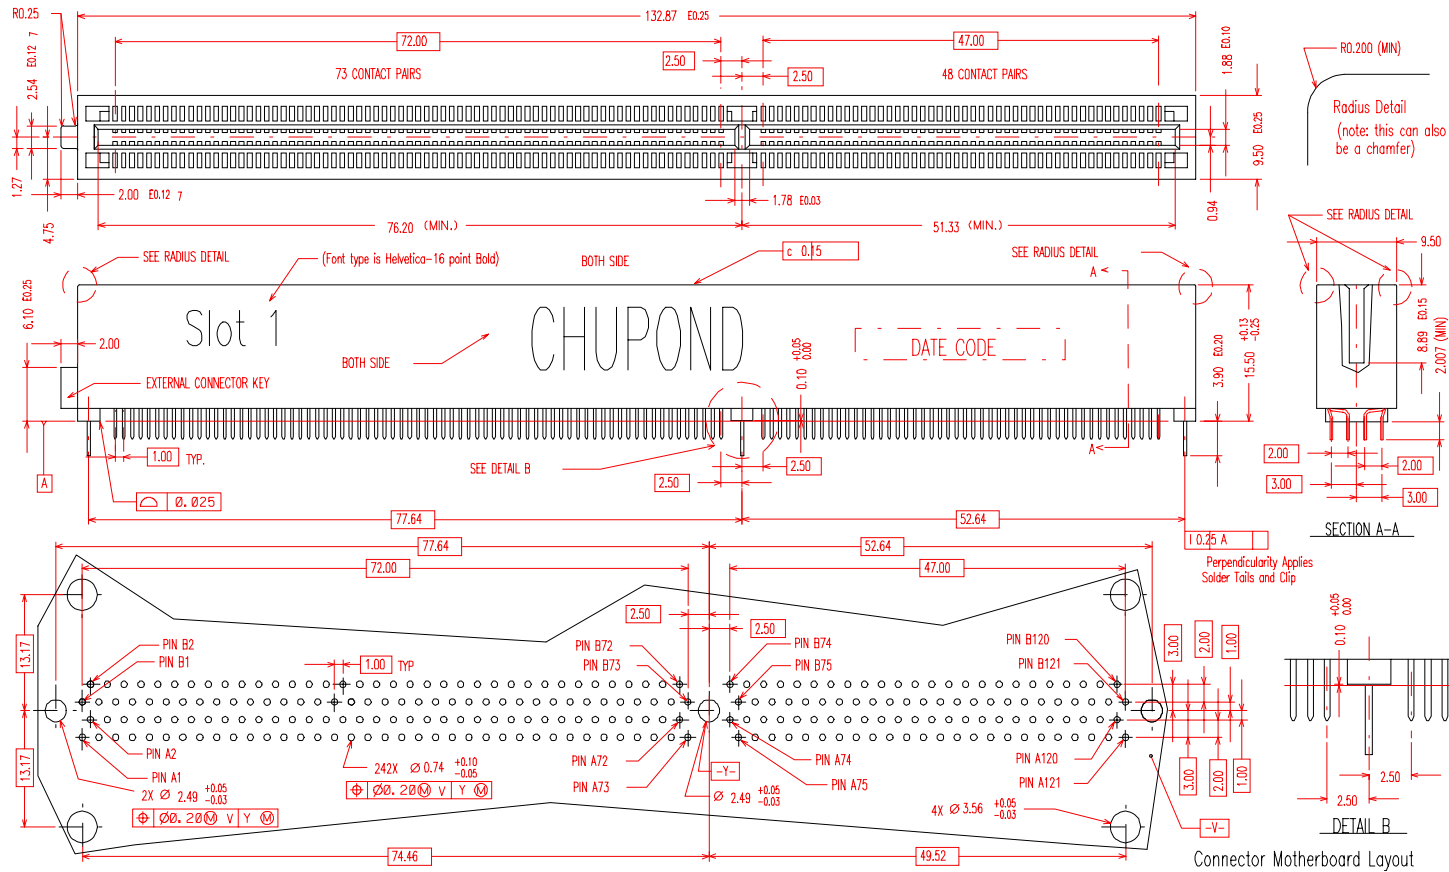

Drawn By: LJ, H	Checked By: H.H.	Contact: Phosphor Bronze, plated 2μ"Au over 15μ"PdNi over 50μ"Ni Solder-tail: plated 100μ" SnPb over 50μ"Ni Housing: Glass-filled PCT, color brown, UL94V-0	 Chupond America, Inc. 6168 Greenhill Rd., New Hope, PA 18938-9630 USA
Drawn: 5/23/97	Scale: None	Contact Resistance: 30milliohms max; Current Rating: 0.5 A per contact Dielectric Withstanding Voltage: 500VAC Min Insulation Resistance: 100 megohms min; Operating Temp: -55°C to+125°C Insertion per Contact/pair: 94g max; Withdrawal per Contact/pair: 56 g max	TITLE: Slot 1 for Pentium II
Released: 7/25/97	Sheet 1 of 1	Tolerances: +/- .25mm +/- 3°	ENG. #: 0206-242-02-C Rev.

This drawing contains information proprietary to Chupond America, and cannot be used without permission